




## SUPERDRAIN DRAINAGE MEMBRANE

### Product Specification Sheet

SUPERSEAL SuperDrain Membrane is for use where high-flow drainage is required.

#### AREAS OF APPLICATION

- Residential & Commercial Applications.
- Foundation walls & parking decks.
- Insulated Concrete Forms (ICF's).
- Blind wall, split slabs, under floor slabs.
- Protection of waterproof coatings.
- Under or over rigid insulation.
- **SUPERSEAL** Waterproofing tape with Geo can replace molding at the top of **SUPERSEAL** Dimpled Membrane, **SUPERSEAL** Double Drain, and SUPER Drain. It can also be used to seal overlaps and edges.

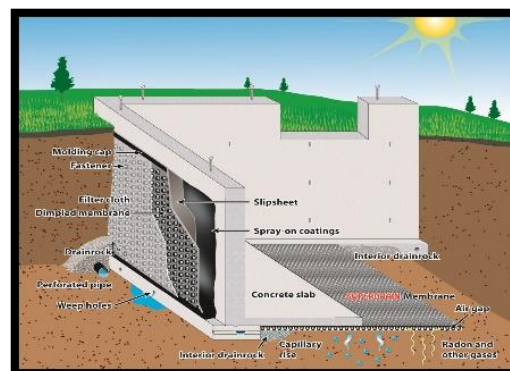

PROPERTIES & TESTING	TECHNICAL DETAILS
PHYSICAL PROPERTY	
<b>Dimpled Membrane</b>	High-Density Polyethylene (HDPE)
<b>Geotextile cloth</b>	Polypropylene (PP) non woven
<b>Color – Dimpled Membrane</b> <b>– Geotextile cloth</b>	Black Grey
<b>Area Weight</b> – Membrane – Geotextile Cloth	<b>710 g/m<sup>2</sup></b> 600 g/m <sup>2</sup> 110 g/m <sup>2</sup>
<b>Sheet Thickness</b>	0.6 mm (24 mil)
<b>Dimple Height</b>	8mm (5/16")
<b>Dimple Spacing (approx.)</b>	1860 per m <sup>2</sup>
<b>Air Gap Between Dimples</b>	5.31 l/m <sup>2</sup>
<b>Drainage Capacity</b>	4.6 l/s/m <sup>2</sup> 276 l/min/m <sup>2</sup> 16,600 l/h/m <sup>2</sup> 6.6 gal/min/ft
<b>Geotextile Flow</b>	2460 l/min/m <sup>2</sup> 59 gal/min/ft
<b>Compressive Strength</b>	320 kN/m <sup>2</sup> (6,684 psf)
<b>Service Temperature Range</b>	-40°C to 80°C
<b>Fire Resistance Rating</b>	B2 (DIN 4102)
<b>Sheet Thickness</b>	0.6 mm (24 mil)

ROLL SIZES	
PART #	PRODUCT
SM67200	6'7" x 65.5'
SM80240	7.11" x 65.5'

ACCESSORIES	
PART #	PRODUCT
SZ81179	Membrane Cap (bundle of 10pcs)
SZ79550	Bag of 50 Super Plugs
SZ80100	Bag of 100 Small Plugs

Please go to [www.superseal.ca](http://www.superseal.ca) for the current Product Data Sheets.

